

06/2011

Mod: ASA-200


Production code: MICRON 18 +UC +SP



Diamond
catering equipment

MICRON Refrigerated Display Counter

Refrigeration details (25 Deg C / 60% R.H.)	
Climatic Class (EN23953-2):	3
Goods Temperature Class (EN23953-2):	M2
Refrigeration Type	Ventilated
Average Extraction Rate	260 W/m
Evaporating Temperature	-10°C
Refrigerant	R404A
Defrosting Type	Stop compressor
Number of Defrosting	1 every 8 hours
Duration of Defrosting	40 minutes
Liquid Pipe Entry Size	6 mm
Suction Pipe Exit Size	12 mm
Valve Type	Welded
Valve Model	Danfoss
Drain Outlet Size	40 mm

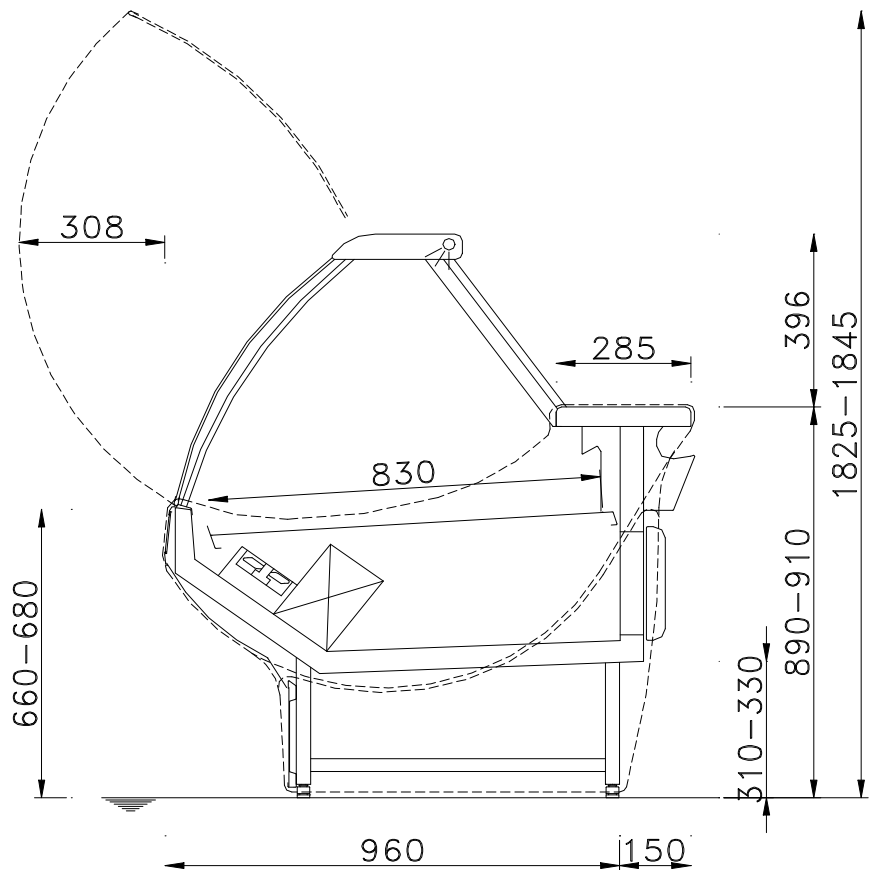

Electrical Features (230Vac / 50Hz)	Unit	Available Lengths (mm)									
		1250	1563	1875	2500	3125	3750	90°	135°	225°	270°
Evaporator Fans	W	20	20	40	40	60	60	40	40	40	40
Canopy Lighting	W	44	46	73	90	119	146	73	90	90	90
Anti-sweat	W	46	56	72	96	122	146	108	108	84	58
Rated Output*	W	110	125	190	230	300	355	220	240	215	190
Condensing Unit	W	270	360	425	425	525	700	425	425	425	425
Rated Output with Condensing Unit*	W	380	485	615	655	825	1055	645	665	640	615
Mezzanine Shelf Lighting (option)	W	44	46	73	90	119	146	73	90	90	90

*: When options are present, add the optional power to the rated output.

Display Deck Area	sqm	1,1	1,4	1,6	2,2	2,7	3,2	1,56	1,93	1,96	2,13
Max product weight on display deck	kg	100	130	150	200	250	300	160	190	190	210

Technical Features	Type / Material	Model
Canopy Lighting	Fluorescent Neon Tube	PINK
Mezzanine Shelf Lighting	Fluorescent Neon Tube	PINK
Controller	Electronic	-----
Water Evaporating System with Condensing Unit	Hot Gas - Manual	-----
Water Evaporating System without Condensing Unit	Manual	-----
Inside Belley - Display Deck	Stainless Steel	-----
Evaporator	Painted	-----