

MOD : CNE/6PRA

Production code : NEN16ALME



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric noodle cooker with 750 mm depth, equipped with two high-efficient heaters of a total connected load of 12 kW. Equipped with auto-lifting modul to control 6 basket individually.

One tank made of salt-resistant stainless steel. With a faucet for tank filling, easy operable from the front panel. Designed for continuous and high-speed cooking of noodles, the perfect choice for any Asian restaurants.

Made of AISI 304 with 1.5 mm top thickness, temperature controlled, welded noodle tank.

MAIN FEATURES

- Powered with 12 kW immersion rod heating elements.
- Capacity up to 30 liters.
- Usable for six noodle baskets with auto-lifting features.
- Six individual timer, one for each baskets. Resettable through two button simultaneous push.
- Manual water filling system with knob integrated on the front panel.
- Thermal-cut off when overheated.
- Three level rotary switch with control knob and function indication lights.

CONSTRUCTION

- External construction entirely with AISI 304.
- Top panel with 1.5 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Nayati connection system between Meritus products on the front panels, cabinets, and splashbacks.
- Cabinet executed with H2 radius.
- Deep drawn front panel to minimize liquid penetration to the internal part.
- Gasket protection behind the knobs to prevent water to seeping in, prolonging main heating regulation parts.
- IPX5 water protection level.


INCLUDED ACCESSORIES

- Noodle basket (6 pcs.).
- Basket holders (6 pcs.).
- Auto-lifting kit.
- Swing door.
- Drain filter and splash guards.


OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 4 mm) p/mtr.
- Joint clip ME.


FRONT

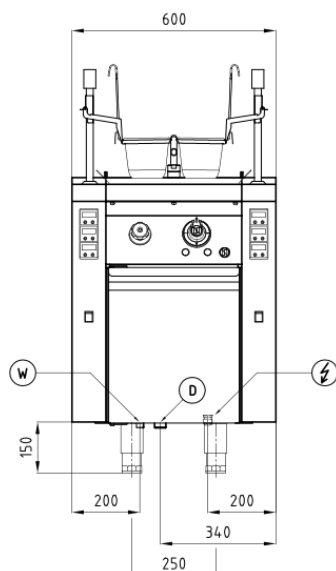

TOP

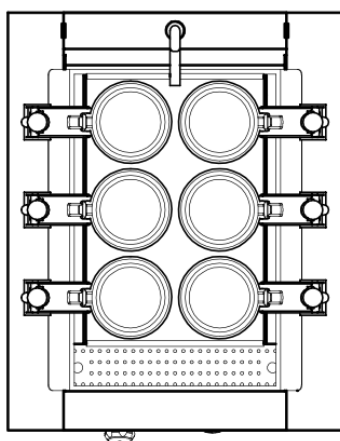

SIDE

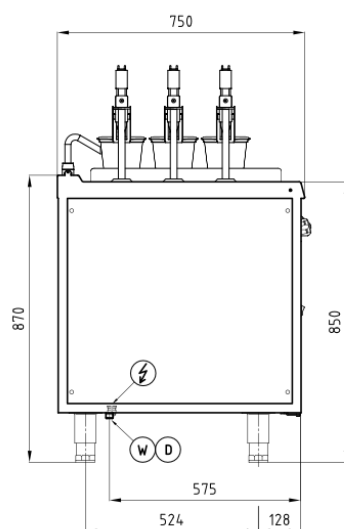

TECHNICAL DATA

External Dimensions

Width	: 600 mm
Depth	: 750 mm
Height	: 850/1200 mm

Cooking Surface

Cooking zones	: 30 liters, 320 x 475 mm
Heating zones	: 2
Control type	: Modulating temperature control, autolifter: individual timers with reset functionality.

Electrical Supply Data

Total connected load	: 12.04 kW
Voltage Recommended	: 400V, 3PNE AC /50-60Hz
fuse	: 20 A (slow)

Connections

Water	: DN 15 (1/2")
Drain	: DN 25 (1")

Heat & Steam Emissions

Direct heat emission	: 1.42 kW
Latent heat emission	: 2.40 kW
Steam emission	: 3.53 kg/h

PACKAGING DATA

Width	: 630 mm
Depth	: 780 mm
Height	: 990 mm
Volume	: 0.49 m ³

WEIGHT

Net Weight	: 81 kg
Gross Weight	: 92 kg

*Overall dimension in mm