



MOD : DEC-12/N

Production code : HE12E-9996HE12-A6XXA


06/2026




	PESO WEIGH POIDS GEWICHT KG	CAPACITA' CESTO BASKET CAPACITY CAPACITE PANIER KORBKAPAZITÄT LT	CAPACITA' CESTO BASKET CAPACITY CAPACITE PANIER KORBKAPAZITÄT KG	GIRI /RPM	KW	Ø x h: CESTO Ø x h: BASKET Ø x h: PANIER [mm]
	78	25	6	1400	0.4	330 x 285
	110	32	8	1400	0.6	390 x 270
DEC-12/N	120	42	12	1400	0.8	420 x 300
DEC-16/N	124	50	16	1400	1.1	450 x 315
DEC-18/N	145	76	18	1400	1.8	491 x 400
DEC-20/N	180	76	20	1400	1.9	491 x 400
DEC-25/N	180	97	25	1000	2.1	550 x 411

Tensione e frequenza a richiesta - Voltage and tension line to request –
Tension et ligne de tension à demander – Spannung und Frequenz auf Anfrage

Tensione monofase Single phase frequency Fréquence monophasé Versorgungsspannung 1	M = V.230 HZ 50	M =V.230 HZ 60
Tensione trifase + Neutro Tree-pahse frequency Fréquence triphasé Versorgungsspannung 3	T = V.230/400 HZ 50	T = V.230/400 HZ 60
Rumorosità Noise Bruit	< 70 DB (A)	

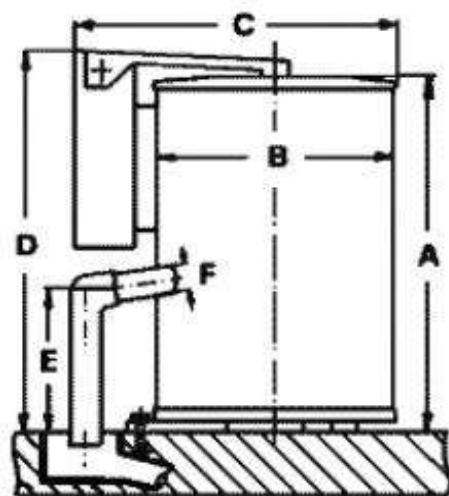

N° 3 Fori D. 12.5 a
120° su D. 752.5

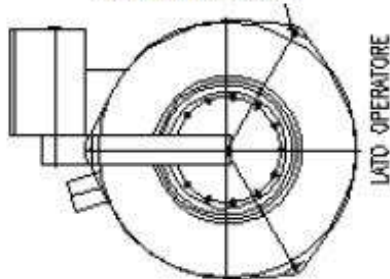

TIPO	A	B	C	D	E	F	G	H
-----	840	423	645	905	445	70	10	459
-----	840	527	750	910	445	70	12.5	562
DEC-12/N	880	586	810	950	445	70	12.5	620
DEC-16/N	880	586	810	950	445	70	12.5	620
DEC-18/N	990	586	810	1060	445	70	12.5	620
DEC-20/N	998	703	930	1070	445	70	12.5	752.5
DEC-25/N	998	703	956	1070	445	70	12.5	752.5