MOD : E22/PLNC12-HP

Production code : 393404

11/2023

Modular Cooking Range Line ECO900 1200mm Electric Fry Top HP, Smooth Scratch Resistant Chromium Plate



393404 (N9IIKDAOMIA) Large electric fry top with smooth scratch resistant chromium cooking surface, thermostatic control, scraper included

Short Form Specification

Item No.

Smooth scratch resistant chromium cooking surface. Heating elements positioned beneath the cooking plate to ensure very fast heat-up time to maximum temperature and quick temperature recovery. High precision thermostatic control. To be installed on open base installations, bridging supports or cantilever systems. Removable drawers below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

APPROVAL:

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Safety thermostat and thermostatic control.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Two large drain holes on cooking surface permits the draining of fat into two separate 3 liter collectors placed under the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- Infrared heating elements mounted below the cooking surface.
- Units have 4 independent controls to regulate temperature of the cooking surface.
- Scratch resistant cooking surface thanks to a special treatment of the chromium plate.
- Suitable for countertop installation.

Construction

- Cooking surface completely smooth.
- Non-scratch cooking surface 20mm thick for optimum grilling results and ease of use.
- AISI 304 stainless steel worktop, 2mm thick.
- Unit is 900mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 930 mm deep to give a larger working surface area.

Included Accessories

- 1 of Scraper for smooth plate fry tops PNC 164255

Optional Accessories

• Scraper for smooth plate fry tops	PNC 164255	❑
• Junction sealing kit	PNC 206086	❑
• Support for bridge type installation, 1200mm	PNC 206139	❑
• Support for bridge type installation, 1400mm	PNC 206140	❑
• Support for bridge type installation, 1600mm	PNC 206141	❑
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	❑
• Water column with swivel arm (water column extension not included)	PNC 206289	❑
• Water column extension	PNC 206290	❑
• Water drain for fry tops HP	PNC 206345	❑
• Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)	PNC 206346	❑
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	❑


Modular Cooking Range Line ECO900 1200mm Electric Fry Top HP, Smooth Scratch Resistant Chromium Plate

- CLOCHE FOR FRY TOPS PNC 206455 ❑
- Water drain for full module fry tops PNC 216153 ❑


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Modular Cooking Range Line ECO900 1200mm Electric Fry Top HP, Smooth Scratch Resistant Chromium Plate

Front

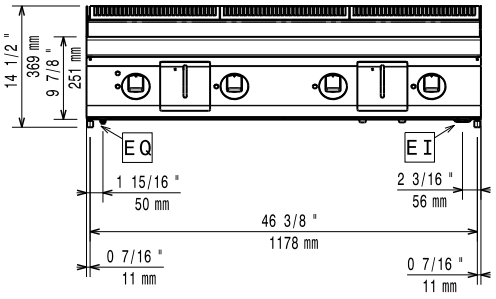


Side

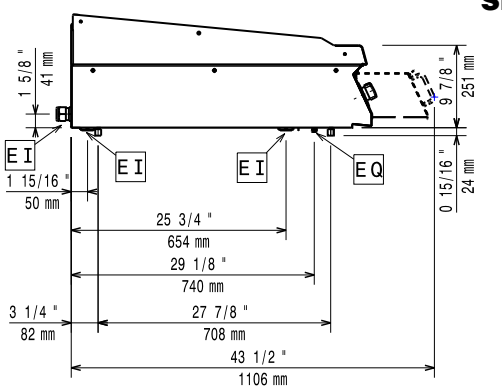

EI = Electrical inlet (power)
EQ = Equipotential screw

Top

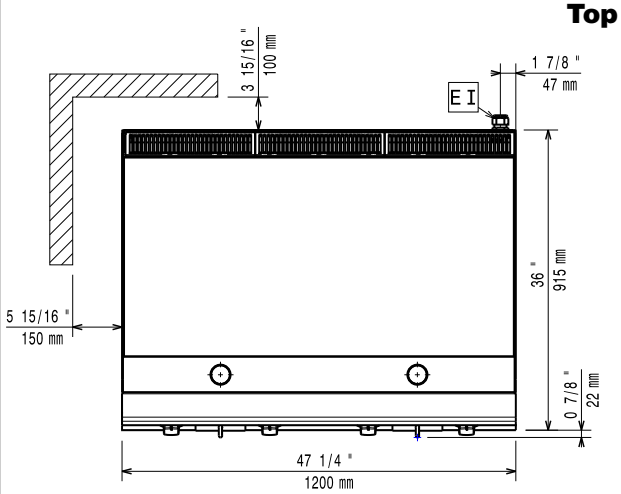

Electric

Supply voltage:	
393404 (N9IIKDAOMIA)	380-400 V/3 ph/50/60 Hz
Total Watts:	20 kW
Predisposed for:	380-400V 3~ 50/60Hz 18-20kW

Key Information:

External dimensions, Width:	1200 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	150 kg
Shipping weight:	170 kg
Shipping height:	540 mm
Shipping width:	1400 mm
Shipping depth:	900 mm
Shipping volume:	0.68 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.08.02