MOD : IN/BX12-PSCX

Production code : 19109823

10/2026



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
IN/BX12-PSCX


21/09/2026

The photo may show the standard model and not the configurated one

DENOMINATION:

- Dry static heat bain-marie well specially designed to hold, display and serve liquid or gravy warm food (e.g. soup, broth, stew, gravy, etc.) keeping displayed product at optimum temperatures during service time.
- Manufactured in stainless steel with satin finish.
- Dry static heat bain-marie well to display pans with different heights.
- Suitable for GN 1/1 pans or subdivisions with a maximum depth of 150 mm. Subdivisions for GN 1/1 included as standard accessories.
- Well with rounded corners inside to make cleaning operations easier, ensuring maximum hygiene.
- Heating system by a set of heaters at the bottom of the tank.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g, furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature in the dry static heat bain-marie well at the desired set point.
- Prepared for installation of a digital thermometer facing the public.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Prepared for installation of a foodshield with light and heat to improve temperature maintenance and increase conservation time on the surface of the food that is easily fixed to the structure by means of threaded plates.
- Prepared for installation of a digital thermometer facing the public.
- Digital thermostat allows turning on, at the same time, bain-marie well and foodshield with light and heat.

DIMENSIONS



X Width	1115	mm	X Gross width	1130	mm
Y Depth	610	mm	Y Gross depth	735	mm
Z Height	373	mm	Z Gross height	410	mm
Net Weight	48,0	kg	Gross Weight	50,0	kg
Net volume	0,254	m3	Gross volume	0,341	m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	1,805 kW
Voltage	220-240V
Phases	1N
Electric frequency	50/60Hz
Amperage (A)	8,11A


COLD TECHNICAL SPECIFICATIONS

Termperature	(+30º/ +100º)

TECHNICAL FEATURES

Cut-out Lenght (mm)	1090
Cut-out Width (mm)	585
Capacity (GN)	3 x GN1/1
Depth well (mm)	158
Cap. well (L) (GN 1/1-40 mm)	17
Cap. well (L) (GN 1/1-65 mm)	27
Cap. well (L) (GN 1/1-100 mm)	42
Cap. well (L) (GN1/1-150 mm)	63

MACHINES DRAWING ELECTRICAL & DRAIN SITUATIONS

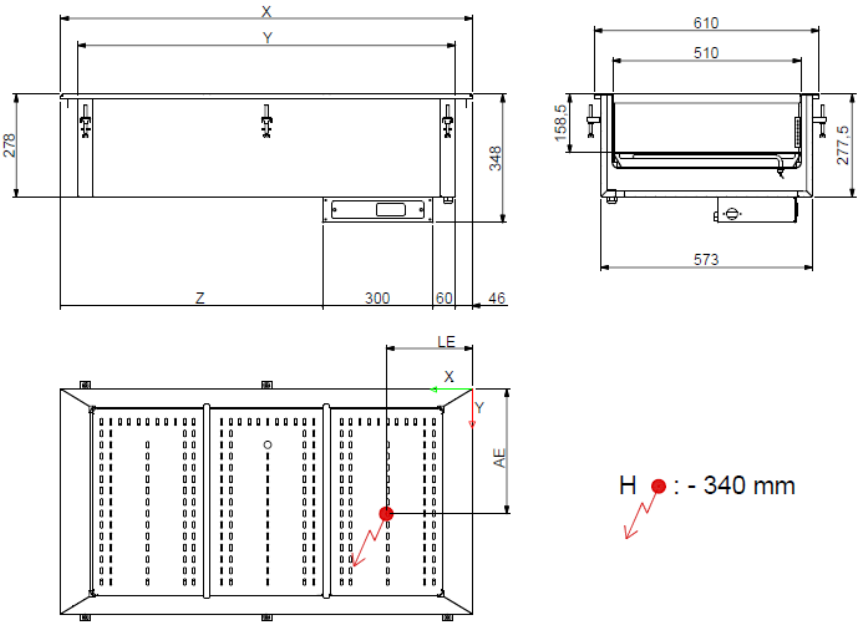

W = 610 mm
LE : 231 mm
AE : 334 mm

	W = 610 mm			
	X	Y	Z	V
3GN	1115	1023	709	573
4GN	1440	1348	1034	573
5GN	1765	1673	1359	573

Fig 1.