

02/2016


Mod: DCR37/AC

Production code: TT 28-16+A





		Model	DCR37/AC (Active wash)	
		Code Production	PT2816SCBE	
		Interface :		
				
				
	Overall Dimension (Width-Depth-Height) *open	mm	788x835x1565(2080*)	
	Packaging Dimension (WxDxH)	mm	870x830x1530	
	Gross weight	Kg	130	
	Net weight	Kg	120	
	Volume	mc	1,1	
	Rack size	mm	600x500	
	Max door /hood opening	mm	465	
	Max glasses/plate Height	mm	440	
	General construction		double skin	
	Door/hood Construction		double skin	
	Tank construction		deep drawn	
	Tank volume	liter	30	
	Tank heating element	W	3000	
	Tank surface strainers		Inox	
	Wash pump type		double flow	
	Wash pump power	W	1500	
	Wash temperature	°C	60	
	Boiler type		Without pressure	
	Boiler volume	liter	11	
	Back-flow system		break tank	
	Boiler heating element	W	8000	
	Rinse booster pump	°C	yes	
	Rinse booster pump power	W	200	
	Rinse temperature	°C	80	
	Rinse water consumption	Liter /rack	2,7	
	Optimal external water pressure	bar	2	
	Drain system		Overflow	
	Drain pump		KIT (DPS-LC/4-NP)	
	Rinse aid dispenser		YES	
	Detergent dispenser		KIT (DD-LC/1-NP)	
	Water softner	Continuous type	YES	
	Wash cycle	sec	60 - 90 - 180	
	Electric Power	W	9500	
	Electric Connection	V - ph - Hz	400V 3+N 50Hz	
	Fuse	A	16	
	Plates racks	Nr	YES	
	Flat Rack	Nr	YES	
	Cutterly Rack	Nr	YES	
	Electric cable		YES	
	Drain hose		YES	
	Fill hose		YES	


A		Ø 32 mm
B		G 3/4"
C		Power supply

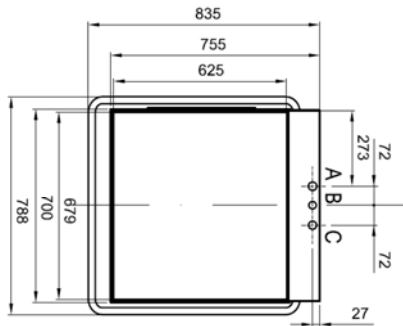

*
LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE UTILE POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO

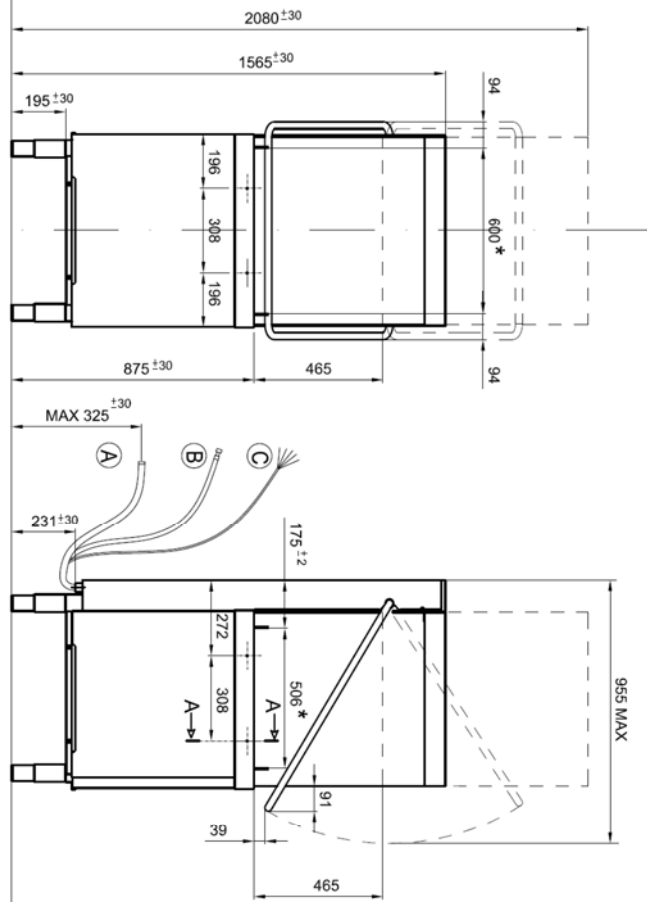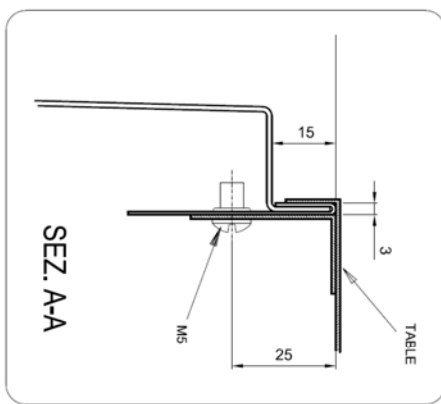

INSTALLAZIONE IN LINEA
LINEAR INSTALLATION
INSTALLATION EN LIGNE
ZEILENINSTALLATION
MESA EN LINEA

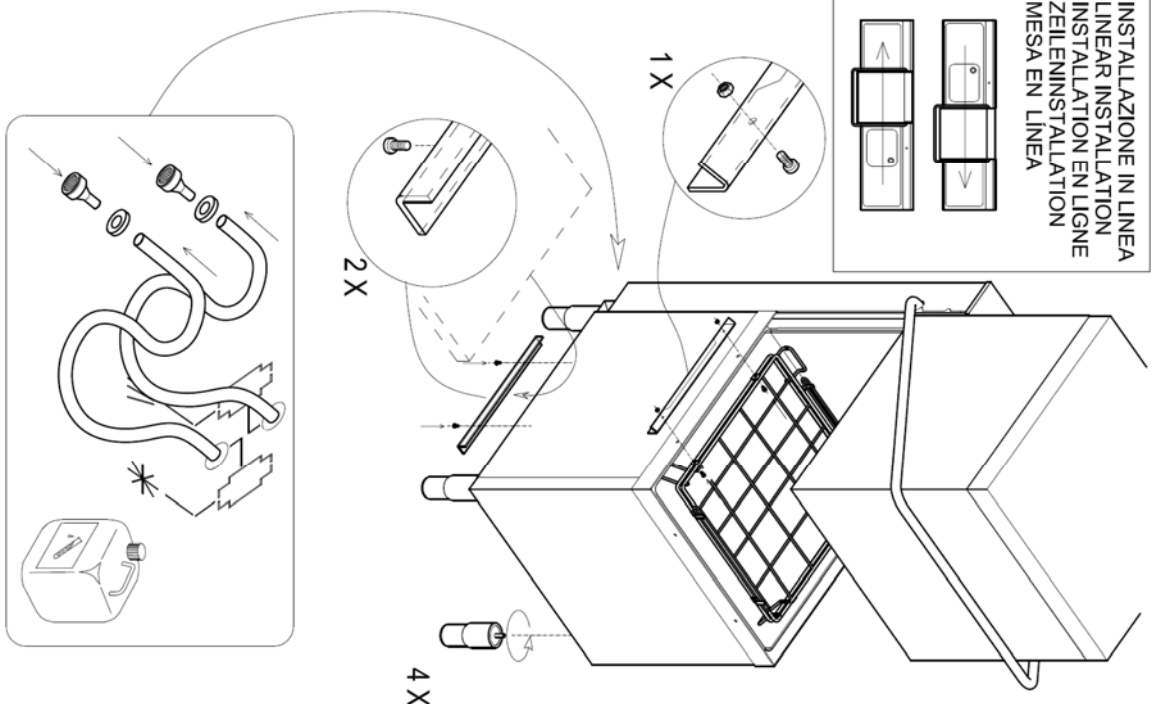

Installation layout	Hood type
MARCO	70990 02
Date: 03.12.2013	Revisión:
Designed by:	
Code:	
Rev.:	

