

MOD : GEL/48L-R2

Production code : GELATISSIMO F9

Technical data:
Model GEL/48L-R2

- -15 / -18°C
- Dimensions: 125.5 × 52.5 × 36 cm (height)
- Weight: 35 kg
- Power: 230V 50Hz 0.50 kW
- CE EN 60335-2-24




Optional :

- Stainless steel trays

Refrigerated counter for ice cream with transparent cover

- ECO refrigerant gas R290a
- V230-1-50 (others available on request)
- Eco insulation, CFC-free
- ABS structure
- Copper evaporator
- Quiet operation
- Low energy consumption
- Dust or flour filter
- Easy maintenance
- Easy cleaning
- CE marking

Possible combinations :

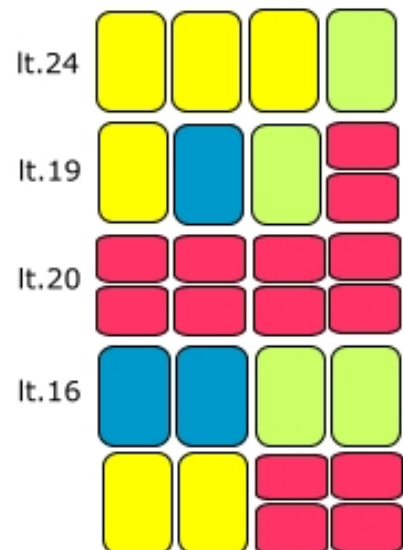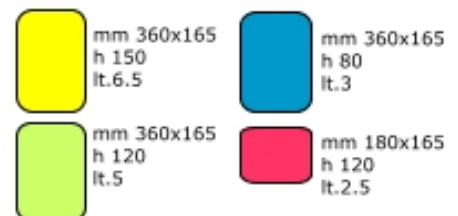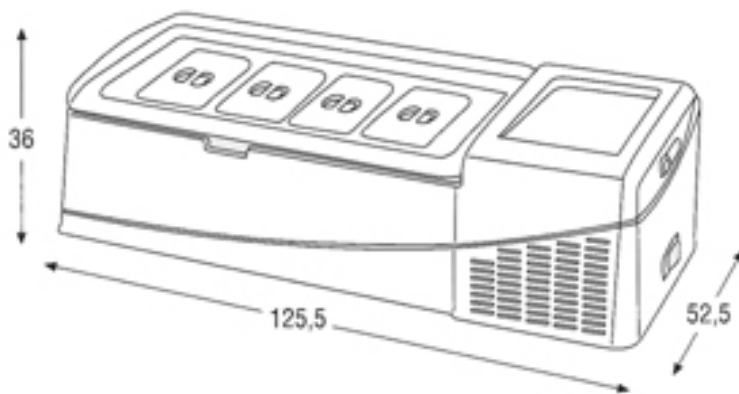

CARATTERISTICHE TECNICHE

TECHNICAL CHARACTERISTICS/ TECHNISCHE EIGENSCHAFTEN/ CARACTERISTIQUES TECHNIQUES

		230V - 50 Hz		115V - 60 Hz	
Temperatura di refrigerazione <i>Cooling temperature</i> <i>Kühltemperatur</i> <i>Température de réfrigération</i>	MIN		- 22° C		- 8° F
	MAX		+ 5° C		+ 41° F
Potenza elettrica assorbita <i>Absorbed electrical power</i> <i>Aufgenommene Elektroleistung</i> <i>Puissance électrique absorbée</i>		kW	0,52		1,04
Corrente max assorbita <i>Max absorbed current</i> <i>Maximale Stromaufnahme</i> <i>Courant maximal absorbé</i>	FLA	A	2,5		5,00
Corrente max di spunto <i>Max pick-up current</i> <i>Maximaler Spitzenstrom</i> <i>Courant maximal de démarrage</i>	LRA	A	9,5		19
Alimentazione elettrica <i>Electrical power supply</i> <i>Stromversorgung</i> <i>Alimentation électrique</i>			230V/50Hz		115V/60Hz
Dimensioni <i>Dimensions</i> <i>Abmessungen</i> <i>Dimensions</i>	L	mm	125,5		125,5
	P	mm	52,5		52,5
	H	mm	36		36
Peso (senza bacinelle) <i>Weight (without basins)</i> <i>Gewicht (ohne Schalen)</i> <i>Poids (sans bacs)</i>		kg	32		32
Tipo refrigerante <i>Refrigerant gas type</i> <i>Kühltyp</i> <i>Type de réfrigérant</i>			R290		R290
Carica refrigerante <i>Refrigerant charge</i> <i>Kühllast</i> <i>Charge réfrigérante</i>		kg	0,210		0,210
Capillare <i>Capillary pipe</i> <i>Kapillare</i> <i>Capillaire</i>	Øi	mm	0,90		0,90
	L	mm	4200		4200