




MOD : DCR37/6

Production code : TT3922BEC

08/2026



MODEL: DCR37/6

Overall Dimension (Width-Depth-Height) *open	mm	788x835x2080
Packaging Dimension (WxDxH)	mm	870x830x1530
Gross weight	Kg	135
Net weight	Kg	125
Volume	mc	1,1





		Interface	
	Rack size	mm	600x500
	Max door /hood opening	mm	465
	Max glasses/plate Height	mm	440
	General construction		double skin
	Door/hood Construction		double skin
	Tank construction		deep drawn
	Tank volume	liter	30
	Tank heating element	W	2.500
	Tank surface strainers		Inox
	Wash pump type		double flow
	Wash pump power	W	1.500
	Wash temperature	°C	60
	Boiler type		without pressure
	Boiler volume	liter	12
	Back-flow system		break tank
	Boiler heating element	W	8.000
	Rinse booster pump		yes
	Rinse booster pump power	W	200
	Rinse temperature	°C	80
	Rinse water consumption	Liter /rack	3,0
	Optimal external water pressure	bar	2
	Drain system		overflow
	Drain pump		KIT (DPS-LC/4-NP)
	Rinse aid dispenser		YES
	Detergent dispenser		KIT (DD-LC/1-NP)
	Water softner	Continuous type	NO
	Wash cycle	sec	60 - 110 - 150 - continuous
	Electric Power	W	9.500
	Electric Connection	V - ph - Hz	400V 3+N 50Hz
	Fuse	A	16
	Plates racks		YES
	Flat Rack		YES
	Cutterly Rack		YES
	Electric cable		YES
	Drain hose		YES
	Fill hose		YES

A		Ø 32 mm
B		G 3/4"
C		Power supply

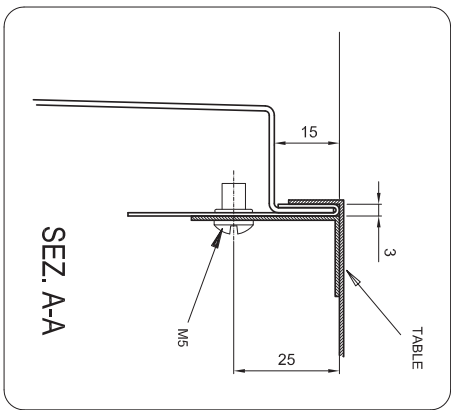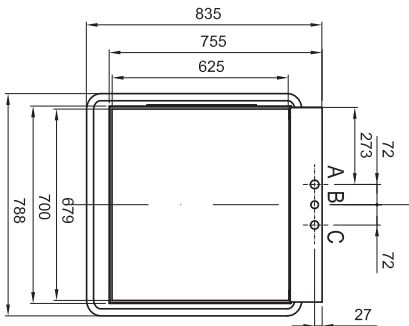

* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE UTILE POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO

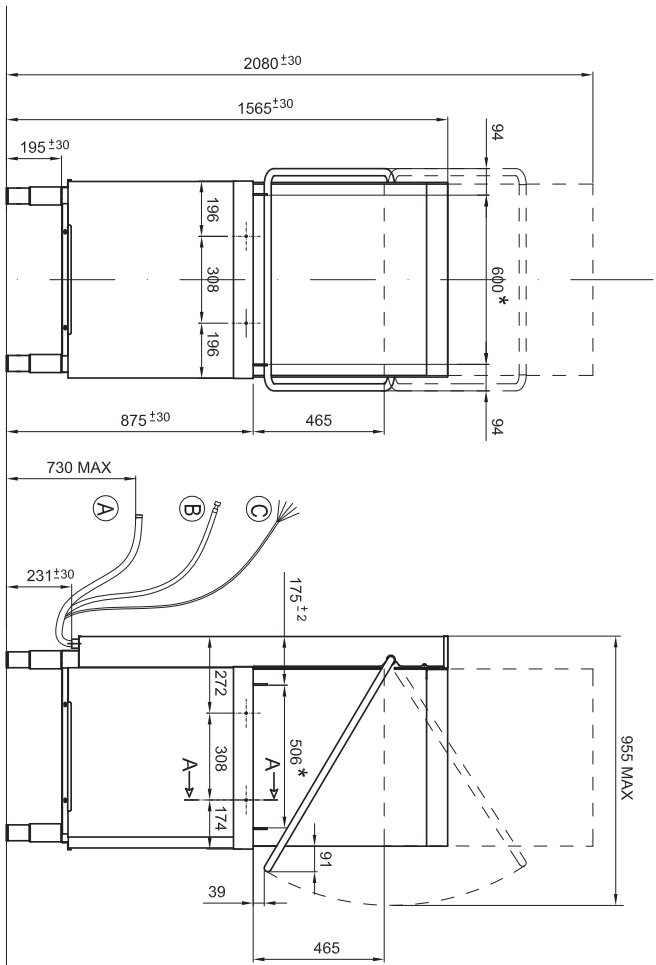

Installation layout		Hood type with drain pump	70991 02	
Designed by:	M. PUCI	Date:	03.12.2013	Denomination:

